


Southwire™

CORD SOLUTIONS CATALOG

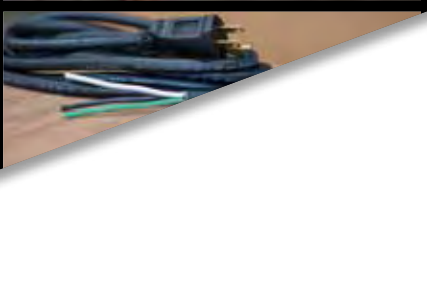

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

SOUTHWIRE.COM

OUR STORY

For over 60 years, Southwire has provided high quality electrical wire and cable to the commercial and industrial construction industries. Now, the name you trust provides durable, cutting-edge professional grade tools, designed with safety and productivity in mind. Look to Southwire® for solutions to all your electrical needs, from electrician's hand tools, meters, contractor equipment, temporary power, and extension cords.

SOUTHWIRE, THE COMPANY

Southwire Company, LLC is North America's leading manufacturer of wire and cable used in the distribution and transmission of electricity. Throughout its history, our company has sought to help provide power through our products, our service and by helping empower our customers, employees, and communities. With more than 6,800 people at customer service centers, manufacturing facilities and sales offices throughout North America, we are dedicated to developing the highest-quality products and legendary service.

THE DRIVE FOR EXCELLENCE

Driving for excellence starts with being responsive to our customers and the markets we serve. By creating business units, Southwire Company enables each to foster an entrepreneurial spirit, innovative solutions, and responsiveness required in today's business. At the same time each division can leverage the resources and rich history of Southwire Company as a whole.

THE PRODUCTS

To be successful requires products that give you solutions no matter what stage of the project cycle you are in. Our product teams and dedicated resources work together to listen to and work with our customers, creating solutions that deliver unparalleled value through product innovation, safety and efficiency.

THE SERVICE

Service is more than a word or a phone number; it's a tangible support system that assists you through the entire project cycle. Starting with our own knowledgeable customer service team, to our National Field Sales team, and our District Merchandising Specialists. In the office or in the field, we're there to lend a hand, just when you need it most. Feel free to reach us at 1-855-SWT00LS (855-798-6657)

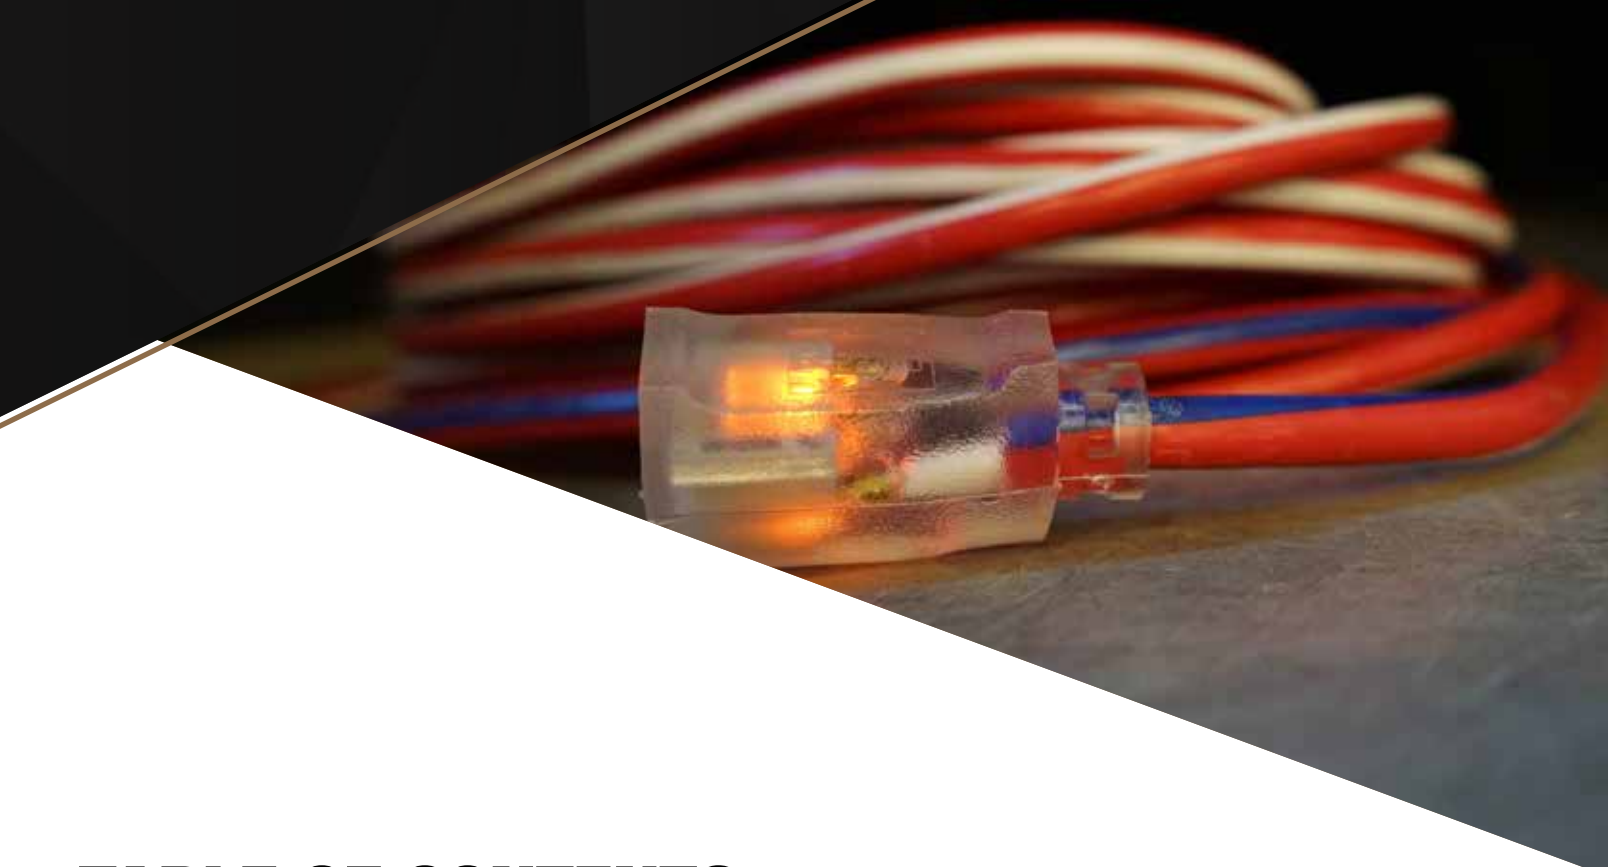


TABLE OF CONTENTS

OUTDOOR CORDS

Standard	14
Red, White, & Blue	17
Tri-Tap.....	18
20A 5-20.....	20
Heavy Duty.....	21
Multi-Outlet.....	22
Push-Lock.....	23

COLD WEATHER CORDS

Polar Solar® Supreme.....	28
Polar Solar®	29
Cold Flex™	32

TWIST LOCK & GENERATOR CORDS

Twist Lock.....	36
Generator Cords.....	37
Generator Adapters.....	38

SPECIALTY CORDS


Royal® Welding Cords.....	43
Oil Resistant Agripro™ Cords.....	45
Conversion Center Cords	48
Metal Power Strips	49
Coil Cords	50

RANGE, DRYER AND APPLIANCE

Range & Dryer	53
Replacement.....	54
Appliance.....	56

CORD MANAGEMENT AND REELS

Storage	58
Reels.....	59
Retractable Reels	60

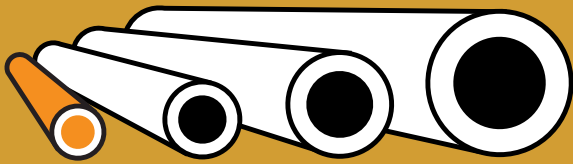


16 GAUGE


LIGHT DUTY

SUGGESTED USE

2-PRONG



3-PRONG

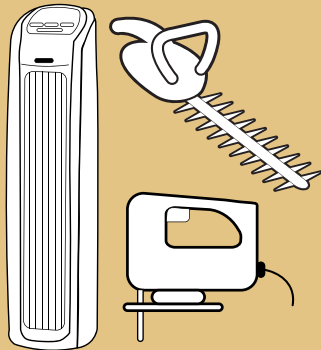

2-PRONG
FANS
SMALL APPLIANCES
STEREOS

3-PRONG
SPACE HEATERS
HEDGE TRIMMERS
JIG SAWS

AMP RATINGS

13
AMPS


13
AMPS

10
AMPS

25'

50'


100'

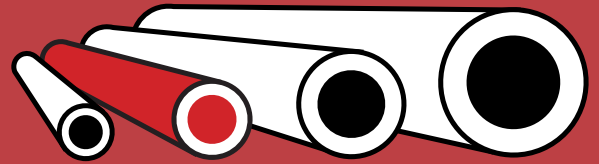

14 GAUGE

MEDIUM DUTY

SUGGESTED USE

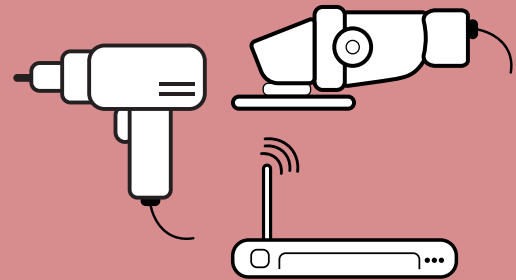

DRILLS
BELT SANDERS
ROUTERS

AMP RATINGS

15
AMPS


15
AMPS

13
AMPS


25'

50'


100'



THE GAUGE OF AN EXTENSION
CORD DETERMINES HOW MUCH
ELECTRICITY IT CAN CARRY




THE SMALLER THE NUMBER
OF THE GAUGE, THE MORE
ELECTRICITY IT CAN CARRY

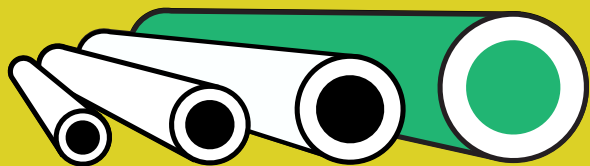

12 GAUGE

HEAVY DUTY

SUGGESTED USE

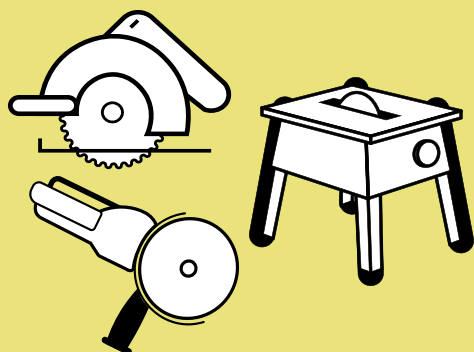

CIRCULAR SAWS
GRINDERS
TABLE SAWS

AMP RATINGS

15
AMPS


15
AMPS

15
AMPS

25'

50'


100'

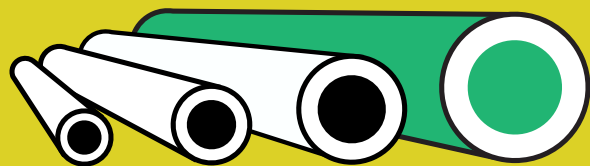

10 GAUGE

EXTRA HEAVY DUTY

SUGGESTED USE

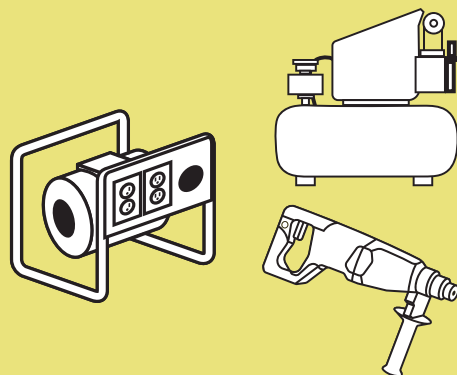

GENERATORS
COMPRESSORS
ROTARY HAMMERS

AMP RATINGS

20
AMPS



20
AMPS

20
AMPS

25'

50'

100'




USING A LARGE NUMBER GAUGE CORD
ON A HIGH-POWER PRODUCT LIKE A SAW,
COULD RESULT IN DAMAGE OF A SAW

DECODING JACKET TYPES

S	SERVICE GRADE <i>(also means extra hard service when not followed by J, V, or P)</i>
J	HARD SERVICE
V	VACUUM CLEANER CORD <i>(also light duty cable)</i>
P	PARALLEL CORD <i>(also known as zip cord) - Always light duty</i>
E	THERMOPLASTIC ELASTOMER <i>(UL/NEC designation ONLY)</i>
O	OIL RESISTANT*
T	THERMOPLASTIC
W	OUTDOOR <i>Includes sunlight resistant jacket and wet location rated conductors (formerly "W-A")</i>
H	HEATER CABLE
VW1	FLAME RETARDANT <i>(Vertical Specimen Flame Test)</i>
FT2	FLAME RETARDANT <i>(Horizontal Specimen Flame Test)</i>

**When only one "O" appears in a classification (i.e. SJEOW), only the outer jacket material is oil resistant. If two "O's" are in the classification (i.e. SEOWW), the insulation covering the conductors and the outer jacket insulation are both oil resistant.*


NEMA CONFIGURATIONS




**NEMA
6-50R**




**NEMA
14-50P**




**NEMA
1-15P**




**NEMA
1-15R**




**NEMA
L14-30P**



**NEMA
L14-30R**



**NEMA
5-20P**




**NEMA
5-20R**



**NEMA
L14-20P**



**NEMA
L5-20P**



**NEMA
L5-20R**




**NEMA
L5-30P**




**NEMA
L5-30R**




**NEMA
L6-30P**



**NEMA
L6-30R**




**NEMA
6-50P**



**NEMA
6-50R**



**NEMA
5-15R**



**NEMA
5-15P**

NEMA connectors are power plugs and receptacles used in North America and other countries that follow the National Electrical Manufacturers Association's guidelines. NEMA wiring systems have current ratings ranging from 15 to 60 amps (A) and voltage ratings ranging from 125 to 600 volts (V). Non-interchangeable connectors are made up of different combinations of contact blade widths, shapes, orientations, and dimensions that are specific to each voltage, electric current carrying power, and grounding method.

INKJET CORDS



CUSTOMIZABLE

Southwire's inkjet extension cords allow the user to put custom text printed on extension cord jacket to call out ownership, purpose, storage location, or even advertising. Inkjet is the fastest method to get a custom extension cord with the lowest purchase quantity.



OPTIONS:

- Available in 4 high-viz colors: PINK, BLUE, YELLOW, AND GREEN
- 12 Gauge
- 50' or 100'
- SJTW Jacket (-40°F to 140°F) and SJEOW Jacket available in yellow only (-58° F to 221°F)

TURN AROUND:

3 Weeks

MINIMUM RUN:

2,500'

HOW TO ORDER: WWW.SOUTHWIRE.COM/CUSTOMIZED-SOLUTIONS


CUSTOM CORDS

Southwire custom cords allow you to create the perfect cord for your needs. These cords are all UL listed with molded connectors and are fully customizable.

OPTIONS:

- 14-10 gauge as well as 6/3 and 8/1 temp power cords
- Outlet options: 5-15, L5-20, Tritap and 50A California Style
- Jacket Selection: SJTW, SJEOW, and Low Temp SJTW
- 30 color options for the cable and stripe
- Printed custom text options
- Any length available

CORD SET TYPE:

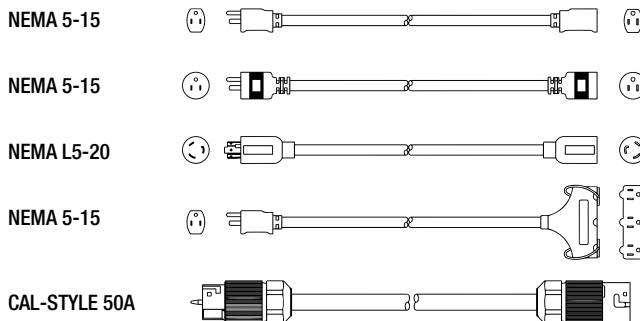

TURN AROUND:

6-8 Weeks

MINIMUM RUN:

10,000' & 5,000' runs for 20% surcharge

COLORS:



Don't see a connector or cable type you need? Talk to your Southwire sales team about other opportunities to get the cords configurations you need.

HOW TO ORDER: WWW.SOUTHWIRE.COM/CUSTOMIZED-SOLUTIONS



OUTDOOR EXTENSION CORDS

Southwire Outdoor Extension Cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.



OUTDOOR EXTENSION CORDS



**STANDARD
OUTDOOR**



JACKET MATERIAL

PVC

JACKET TYPE

SJTW, SJOW, SJTOW, STW

APPLICATION

**GENERAL
OUTDOOR USE**

TEMPERATURE RANGE

-40°F TO 140°F



HEAVY DUTY OUTDOOR



JACKET MATERIAL

PVC

JACKET TYPE

STW

APPLICATION

THICKER JACKET THAN
A STANDARD OUTDOOR
CORD FOR INCREASED
DURABILITY

TEMPERATURE RANGE

-40°F TO 140°F



LOCKING & 20 AMPS



JACKET MATERIAL

PVC

JACKET TYPE

SJTW

APPLICATION

PLUGS & RECEPTACLE NEMA
CONFIGURATIONS ARE HIGH
AMPERAGE APPLICATIONS
TYPICAL OF TEMP POWER
& GENERATORS

TEMPERATURE RANGE

-40°F TO 140°F



OUTDOOR CORDS


STANDARD OUTDOOR EXTENSION CORDS WITH LIT ENDS

2487SW8804



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Pressure Washer, Electric Drill



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
540836	14/3	STW	3'	0.9 m	Red/Black	15	12
541901		SJTW	22'	7 m	Red/Black		6
2487SW8804			25'	7.6 m	Red		12
2488SW8804			50'	15.2 m	Red		6
541902					Red/Black	13	5
54800401					Neon Pink		13
2489SW8804			100'	30.5 m	Red		6
541909					Red/Black	15	3
2577SW000H	12/3	SJTW	25'	7.6 m	Neon Blue		12
2577SW000X					Neon Green		
547703					Dark Green/Yellow		
2577SW000A					Neon Pink		
2587SW8802			50'	15.2 m	Yellow		8
2578SW000H					Neon Blue		
2548SW0064					Neon Blue/Red		
2548SW00HX					Neon Blue/Neon Green		
2548SW0052					Dark Green/Yellow		
2548SW0054					Lime Green/Red		
2578SW000X					Neon Green		
2548SW003V					Neon Orange/Neon Blue		
2578SW000A					Neon Pink		
2548SW0077					Neon Pink/Lime Green		
2548SW0041					Red/White		
2588SW0002					Yellow		
2548SW0022					Yellow/Purple		

OUTDOOR CORDS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2549SW0064	12/3	SJTW	100'	30.5 m	Neon Blue/Red	15	4
2579SW000H					Neon Blue		
2549SW0054					Lime Green/Red		
2579SW000X					Neon Green		
2549SW0052					Dark Green/Yellow		
2549SW003V					Neon Orange/ Neon Blue		
2549SW0077					Neon Pink/ Lime Green		
2579SW000A					Neon Pink		
2549SW0041					Red/White		
2549SW0022					Yellow/Purple		
2589SW0002					Yellow		
2687SW0002	25'		7.6 m	Yellow	6		
26480064	10/3		50'	15.2 m	Neon Blue/Red		4
26480054					Lime Green/Red		
2688SW0002		Yellow					
26490064		100'	30.5 m	Neon Blue/Red	3		
26490054				Lime Green/Red			
2689SW0002	Yellow						



OUTDOOR CORDS | STANDARD

OUTDOOR CORDS

STANDARD OUTDOOR EXTENSION CORDS WITH NON-LIT ENDS

22078803



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Pressure Washer, Electric Drill



**NEMA
1-15R**



**NEMA
1-15P**



**NEMA
5-15R**



**NEMA
5-15P**

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY		
22078803	16/2	SJTW	25'	7.6 m	Orange	13	12		
22088803			50'	15.2 m			6		
22098803			100'	30.5 m		10	6		
2211SW8808	16/3		10'	3 m	Black	13	24		
2304SW8803			10'	3 m	Orange		24		
2306SW8808			15'	4.6 m	Black		18		
2305SW8803			15'	4.6 m	Orange		18		
2307SW8803			25'	7.6 m			12		
2308SW8803			50'	15.2 m			12		
2309SW8803			100'	30.5 m			10	6	
2407SW8804			14/3	25'	7.6 m		Red	15	12
2408SW8804				50'	15.2 m				6
2409SW8804	100'			30.5 m	13	6			
517	10/3		50'	15.2 m	Orange	15	2		
518			100'	30.5 m			2		



OUTDOOR CORDS

RED, WHITE, AND BLUE EXTENSION CORDS WITH LIT ENDS


2548SWUSA1



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Pressure Washer, Electric Drill

 **WE'VE GOT IT
MADE IN AMERICA™**



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2547SWUSA1	12/3	SJTW	25'	7.6 m	Red/White/Blue	15	12
2548SWUSA1			50'	15.2 m			8
65301USA01			75'	22.86 m			4
2549SWUSA1			100'	30.5 m			4



OUTDOOR CORDS | USA CORDS

OUTDOOR CORDS


TRITAP OUTDOOR EXTENSION CORDS WITH LIT ENDS

4189SW8802



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Pressure Washer, Electric Drill



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
540835*	14/3	STW	3'	0.9 m	Red	15	6
4187SW8802	12/3	SJTW	25'	7.6 m	Yellow		12
4188SW8802			50'	15.2 m			6
4189SW8802			100'	30.5 m			4
4388SW8802	10/3		50'	15.2 m			4
4389SW8802			100'	30.5 m			3



OUTDOOR CORDS


TRITAP OUTDOOR EXTENSION CORDS WITH NON-LIT ENDS

4004SW8803



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Pressure Washer, Electric Drill



** Black plugs*

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
4004SW8803	14/3	SJTW	6'	1.8 m	Orange	15	18
4217SW8804			25'	7.6 m	Red		12
4218SW8804			50'	15.2 m			6
4219SW8804			100'	30.5 m		13	6
4112SW8802	12/3	STW	2'	0.6 m	Yellow	15	12
19100002*		SJTW	25'	7.6 m			12




OUTDOOR CORDS | TRITAP CORDS

OUTDOOR CORDS

20A 5-20 EXTENSION CORD

26188802

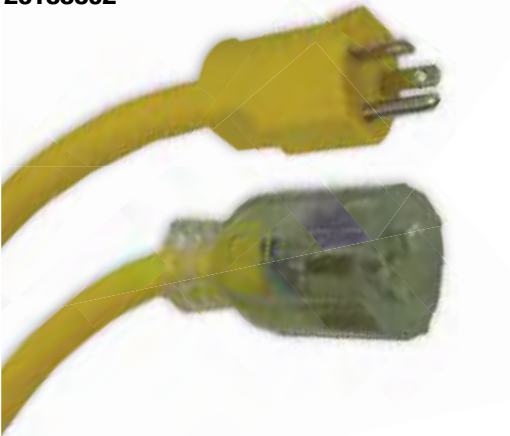

Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Pressure Washer, Electric Drill



**NEMA
5-15R**



**NEMA
5-15P**

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
26188802	10/3	SJTOW	50'	15.2 m	Yellow	20	2
65038701					Black		



OUTDOOR CORDS | 20A 5-20

OUTDOOR CORDS


HEAVY DUTY OUTDOOR EXTENSION CORD

2457SW0003



Southwire heavy-duty extension cords have a thicker jacket than standard outdoor cords to withstand common jobsite wear and tear.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Table Saw, Heat Gun, Work Light



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2457SW0003	14/3	STW	25'	7.6 m	Orange	15	6
2458SW0003			50'	15.2 m			4
2459SW0003			100'	30.5 m		13	3
2557SW0003	12/3		25'	7.6 m		15	6
2558SW0003			50'	15.2 m			4
2559SW0003			100'	30.5 m			3



OUTDOOR CORDS | HEAVY DUTY

OUTDOOR CORDS


MULTI-OUTLET EXTENSION CORDS

90018802



Southwire heavy-duty extension cords have a thicker jacket than standard outdoor cords to withstand common jobsite wear and tear.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Table Saw, Heat Gun, Work Light



SPECIFICATIONS

** Black Plugs*

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
90028802*	14/3	STW	6'	1.8 m	Yellow	15	6
3130			9'	2.7 m	Black		4
90018802			25'	7.6 m	Yellow		4
65038901			25'	7.6 m	Black		2
65039101	12/3		50'	15.2 m	Black		2



OUTDOOR CORDS | MULTI-OUTLET

OUTDOOR CORDS


PUSH-LOCK EXTENSION CORDS

24388826



Southwire push-lock extension cords keep your tools plugged in while doing common yard work.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Leaf Blower, Hedge Trimmer



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
24388826	14/3	SJTW	50'	15.2 m	Yellow/Blue	15	4
24398826			100'	30.5 m		13	3
25388828	12/3		50'	15.2 m	Yellow/Black	15	4



OUTDOOR CORDS | PUSH-LOCK

COLD WEATHER EXTENSION CORDS

Southwire Cold Weather Extension Cords are best used in sub-zero temperatures. Our cords are designed with special compounds in the outer jacket that stays flexible and prevents damage in freezing cold weather. We offer varieties of bright colors that are easily seen on the snow.



COLD WEATHER CORDS



Typical extension cords become very hard to work with in the cold, the jackets will not flex and will hold their position; and in some cases, the jacket will become brittle and break, losing your electrical connection or exposing copper and creating an unsafe working condition.

If you are working in a cold environment, you need the right cold weather extension cord for the job.



COLD WEATHER

COLD WEATHER CORDS



COLD FLEX™



JACKET MATERIAL

TPE

JACKET TYPE

COLD FLEX SJTW

APPLICATION

**GENERAL COLD WEATHER
LESS FLEXIBLE IN EXTREME
LOW TEMPERATURES**

TEMPERATURE RANGE

-58°F TO 140°F



POLAR/SOLAR®



JACKET MATERIAL

TPE

JACKET TYPE

SJE00W

APPLICATION


**COLD OR HOT
OUTDOOR
ENVIRONMENTS**

TEMPERATURE RANGE

-58°F TO 221°F



**POLAR/SOLAR®
SUPREME**

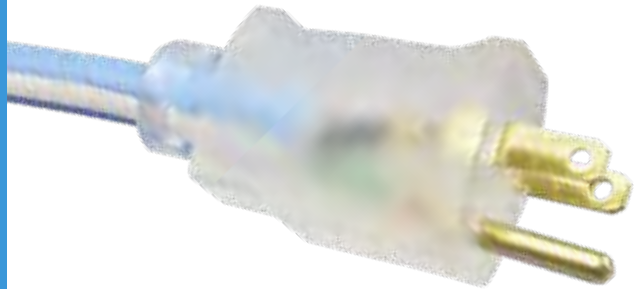

JACKET MATERIAL

PREMIUM TPE

JACKET TYPE

SJEOW

APPLICATION

**EXTREME COLD
OR HOT OUTDOOR
ENVIRONMENTS**

TEMPERATURE RANGE

-94°F TO 221°F



COLD WEATHER CORDS


POLAR/SOLAR® SUPREME EXTENSION CORD

1439SW0061



Polar/Solar® Supreme extension cords are formulated to offer superior jobsite performance in extremely cold weather.

- Temperature Rating of -94°F to 221°F (-70°C to 105°C)
- 125 Voltage Rating
- Abrasion, chemical and oil resistant
- Common Applications: Cable Puller, Chop Saw, Rotary Hammer Drill



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
1437SW0061	14/3	SJEOW	25'	7.6 m	Blue/White	15	12
1438SW0061			50'	15.2 m		15	6
1439SW0061			100'	30.5 m		13	6
1637SW0061	12/3		25'	7.6 m		15	12
1638SW0061			50'	15.2 m		15	6
1639SW0061			100'	30.5 m		15	4



COLD WEATHER CORDS


POLAR/SOLAR® EXTENSION CORD

1287SW0002



Polar/Solar® extension cords are built to stay flexible under the most extreme temperatures.

- Temperature Rating of -58°F to 221°F (-50°C to 105°C)
- 125 Voltage Rating
- Abrasion, chemical and oil resistant
- Common Applications: Cable Puller, Chop Saw, Rotary Hammer Drill



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
1287SW0002	16/3	SJE0W	25'	7.6 m	Yellow	13	12
1288SW0002			50'	15.2 m			12
1289SW0002			100'	30.5 m			6
14840002	14/3	SJE00W	10'	3 m	Yellow	15	24
1487SW0002			25'	7.6 m		15	12
1488SW0002			50'	15.2 m			12
1489SW0002			100'	30.5 m		13	6
1427SW0008	14/3		25'	7.6 m	Black	15	12
1428SW0008			50'	15.2 m			6
1429SW0008			100'	30.5 m		13	6
1687SW0002	12/3		25'	7.6 m	Yellow	15	12
1688SW0002			50'	15.2 m			6
1689SW0002			100'	30.5 m			4
1628SW0008	12/3		50'	15.2 m	Black		6
1629SW0008			100'	30.5 m			4
1787SW0002	10/3		25'	7.6 m	Yellow		6
1788SW0002			50'	15.2 m			4
1789SW0002			100'	30.5 m			3



COLD WEATHER CORDS


POLAR/SOLAR® SJE00W TRIPTAP

3487SW0002



Polar/Solar® extension cords are built to stay flexible under the most extreme temperatures.

- Temperature Rating of -58°F to 221°F (-50°C to 105°C)
- 125 Voltage Rating
- Abrasion, chemical and oil resistant
- Common Applications: Cable Puller, Chop Saw, Rotary Hammer Drill



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	
3487SW0002	12/3	SJE00W	25'	7.6 m	Yellow	15	12	
3488SW0002			50'	15.2 m			6	
3489SW0002			100'	30.5 m			4	
3588SW0002	10/3		50'	15.2 m			4	
3589SW0002			100'	30.5 m			3	



POLAR/SOLAR® SE00W TRIPTAP

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3482SW8802	12/3	SE00W	2'	0.61 m	Yellow	15	15

COLD WEATHER CORDS


POLAR/SOLAR® SE00W HEAVY-DUTY OUTDOOR EXTENSION CORDS

1287SW0002




Polar/Solar® extension cords are built to stay flexible under the most extreme temperatures.

- Temperature Rating of -58°F to 221°F (-50°C to 105°C)
- 125 Voltage Rating
- Abrasion, chemical and oil resistant
- Common Applications: Cable Puller, Chop Saw, Rotary Hammer Drill



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
1567SW0002	14/3	SE00W	25'	7.6 m	Yellow	15	6
1568SW0002			50'	15.2 m			4
1569SW0002			100'	30.5 m		13	3
1767SW0002	12/3		25'	7.6 m		15	6
1768SW0002			50'	15.2 m			4
1769SW0002			100'	30.5 m			3

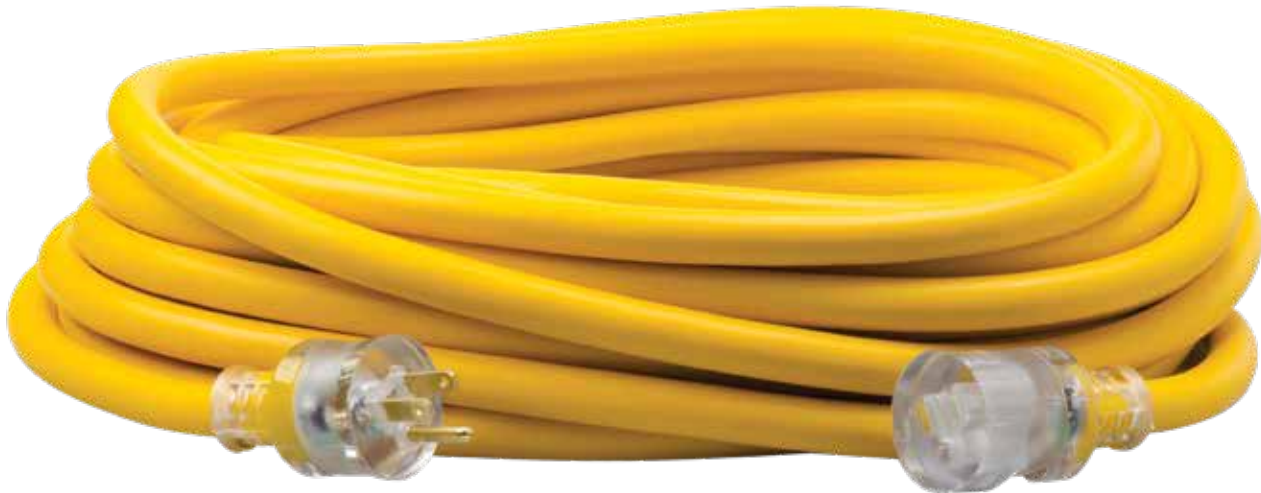

COLD WEATHER CORDS | POLAR/SOLAR® HEAVY DUTY

COLD WEATHER CORDS


COLD FLEX™ OUTDOOR EXTENSION CORDS

2367SW8806



ColdFlex™ extension cords withstand harsh, winter temperatures, and have a highly visible bright blue jacket to increase safety.

- Temperature Rating of -58°F to 140°F (-50°C to 60°C)
- 125 Voltage Rating
- Common Applications: Snow Thrower, Electric Chainsaw, Work Light



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2367SW8806	16/3	ColdFlex SJTW	25'	7.6 m	Blue	13	12
2368SW8806			50'	15.2 m		13	12
2436			100'	30.5 m		10	6
2467SW8806	14/3		25'	7.6 m		15	6
2468SW8806			50'	15.2 m		15	6
2469SW8806			100'	30.5 m		13	3
2437	12/3		25'	7.6 m		15	12
2568SW0006			50'	15.2 m		15	3
2569SW0006			100'	30.5 m		15	4



COLD WEATHER CORDS | COLD FLEX™

COLD WEATHER CORDS


COLD FLEX™ TRITAP OUTDOOR EXTENSION CORDS

32688806




ColdFlex™ extension cords withstand harsh, winter temperatures, and have a highly visible bright blue jacket to increase safety.

- Temperature Rating of -58°F to 140°F (-50°C to 60°C)
- 125 Voltage Rating
- Common Applications: Snow Thrower, Electric Chainsaw, Work Light



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
32678806	14/3	ColdFlex SJTW	25'	7.6 m	Blue	15	6
32688806			50'	15.2			
41688806	12/3						

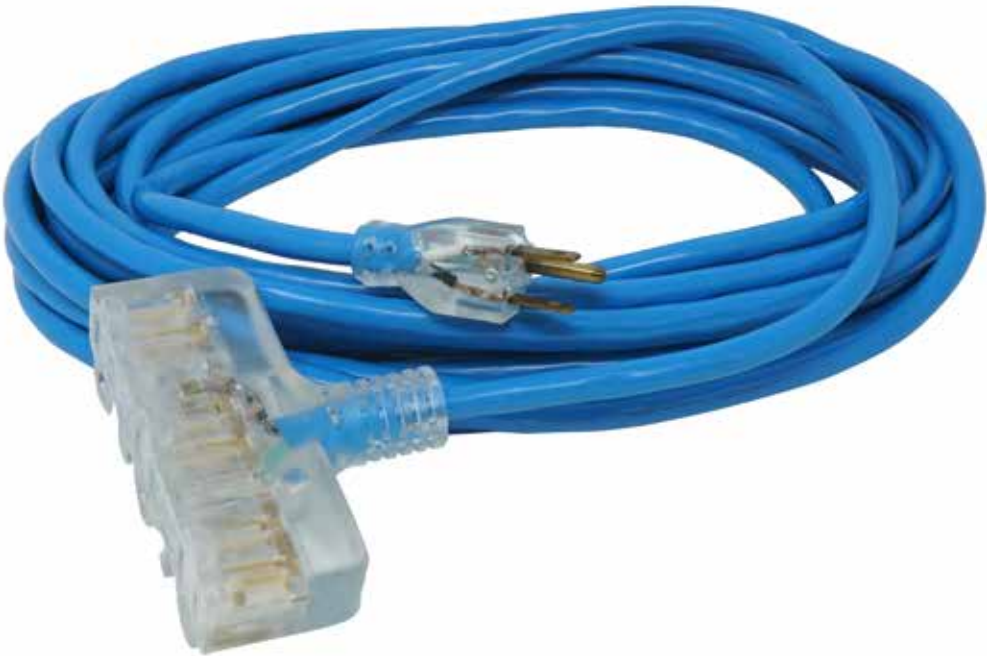

COLD WEATHER CORDS | COLD FLEX™

TWIST LOCK & GENERATOR EXTENSION CORDS

Southwire Twist Lock Extension Cords have a unique blade design that allows the cords to lock into receptacles or outlets with a simple twist action. We offer a vast selection of Generator Extension Cords with different amperage levels for different needs.



TWIST LOCK & GENERATOR

Often, with generator cords, this primary need comes down to having the right plug and receptacle you need to get the job done. Southwire has a broad assortment of cords and adapters to help you deliver power to where you need it as efficiently as possible.


COMMON GENERATOR NEMA CONFIGURATIONS




**NEMA
TT-30P**




**NEMA
TT-30R**




**NEMA
5-20P**



**NEMA
5-20R**




**NEMA
5-15R**



**NEMA
5-15P**




**NEMA
L5-30P**




**NEMA
L5-30R**




**NEMA
L5-20P**




**NEMA
L5-20R**




**NEMA
L14-30P**




**NEMA
L14-30R**




**NEMA
L14-20P**




**NEMA
L14-20R**




**NEMA
6-20P**



**NEMA
6-20R**



**NEMA
10-50P**



**NEMA
10-50R**

When considering what generator cables and adapters you need for a project, you want to avoid voltage drop from the generator. To do this, utilize as short a cable as possible, along with the largest conductor (smallest AWG) and a connector with as high amperage and voltage rating possible. For instance, you will get less power and greater voltage drop out of a generator using a 100' 15 amp 12/3 extension cord with 5-15 plugs compared to a 50' 20 amp 10/3 extension cord with a 5-20 plug.

TWIST LOCK & GENERATOR

L5-20 TWIST LOCK EXTENSION CORDS

9208SW8802





Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Generator, Pool Pump
- NEMA L5-20P



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
9208SW8802	12/3	SJTW	50'	15.2 m	Yellow	20	6	 NEMA L5-20P	 NEMA L5-20R
90288802		STW					4		
9209SW8802		SJTW	100'	30.5 m	Black	15	3		
9029SW8802		STW							
92390008		SE00W							

L14-30 TWIST LOCK EXTENSION CORDS

65038801





Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Generator, Pool Pump
- NEMA L14-30P



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
65172740	10/4	STW	10'	3.05 m	Yellow	30	6	 NEMA L14-30P	 NEMA L14-30R
65172840			20'	6.1 m			6		
65038801			25'	7.6 m	Black		2		
65173040			40'	12.19 m	Yellow		6		
65173140			50'	15.24 m			2		

TWIST LOCK & GENERATOR

GENERATOR ADAPTERS CONVERT TO 20A (5-20R)







19248802



Southwire generator adapters provide more usable receptacles during temporary power outages and on jobsites.

- Temperature Rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
19158802	10/3	STW	3'	0.9 m	Yellow	15	4	 NEMA L5-30P	 NEMA 5-20R Lighted
19248802	12/4					20		 NEMA L14-20P	
19348802	10/4					20		 NEMA L14-30P	
65038601	10/4				Black	20		 NEMA L14-30P	 NEMA 5-20R (x2) Lighted

TWIST LOCK & GENERATOR

TWIST LOCK ADAPTERS

9208SW8802



Southwire twist-to-lock adapters easily convert plugs and receptacles to fit your specific application.

- Temperature Rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Generator, Pool Pump

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
90208802	12/3	STW	9''	0.2 m	Yellow	15-20	10	 NEMA 5-15P	 NEMA L5-20R
90218802			9''	0.2 m		15-20		 NEMA L5-20P	 NEMA 5-15R
90228802			20''	0.5 m		20			 NEMA L5-20R (x2)
90238802			2'	0.6 m		20			 NEMA L5-20R (x3)
90848802			2'	0.6 m	15	6	 NEMA 5-15R Lighted Tritap		
19148802	10/3		3'	0.91 m	Yellow	20-30	4	 NEMA L5-30P	 NEMA L5-20R (x2)
18640008	10/4	SE00W	10'	3.05 m	Black	50	4	 NEMA 14-50P	 NEMA L14-30R
18540008				3.05 m		30	4	 NEMA L14-30P	 NEMA L14-30R

TWIST LOCK & GENERATOR

5-15 ADAPTERS

90188802



Southwire adapters transform your single outlet into multiple outlets.

- Temperature Rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Generator, RV

SPECIFICATIONS

**Black plugs*

STOCK #	GAUGE CONDUCTOR	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
90188802*	12/3	STW	2'	0.6 m	Yellow	15	12	 NEMA 5-15P	 NEMA 5-15R (x2)
90198802*									 NEMA 5-15R (x3)

TWIST LOCK & GENERATOR | GENERATOR ADAPTERS

SPECIALTY EXTENSION CORDS & POWER DELIVERY

Southwire specialty cords provide a broad assortment of cables to suit your needs. These cords are designed to resist damage against high powered machinery while also being oil, solvent, and water resistant.



ROYAL™



JACKET MATERIAL

OIL RESISTANT RUBBER

JACKET TYPE

SJOOW

APPLICATION

**HARSH GARAGE
& WELDING
ENVIRONMENTS**

TEMPERATURE RANGE

-40°F TO 195°F



AGRIPRO™



JACKET MATERIAL

OIL RESISTANT VINYL

JACKET TYPE

SJEOW/SJOW/SJTOW

APPLICATION

**HARSH GARAGE
& AGRICULTURAL
ENVIRONMENTS**

TEMPERATURE RANGE

-40°F TO 140°F



SPECIALTY EXTENSION CORDS



ROYAL® WELDING CORDS

The flow of most devices that need power is fairly consistent. Welders, on the other hand, must change the flow to melt metals and connect work parts. Although these settings are regulated on the welder rather than at the power source, the extension cord that brings the power supply must be able to handle them. That's why voltage, gauge, length and durability are all important considerations to make welding extension cord safe.

Southwire's Royal welding cords are specifically designed to resist damage from slag while also being oil, solvent, and water resistant.



SPECIALTY EXTENSION CORDS


ROYAL® OUTDOOR EXTENSION CORDS

3677SW0008



Royal® extension cords are resistant to welding slag and are the most flexible extension cord on the market.

- Temperature Rating of -40°F to 194°F (-40°C to 90°C)
- 125 Voltage Rating
- Abrasion, Chemical, and Oil Resistant
- Common Applications: Welder, Angle Grinder, Rotary Hammer Drill



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3677SW0008	12/3	SJ00W	25'	7.6 m	Black	15	12
3687SW0002					Yellow		
3676SW0008			40'	12.19 m	Black		6
3678SW0008			50'	15.2 m	Black		6
3688SW0002					Yellow		
3680SW0008			80'	24.38 m			3
3679SW0008			100'	30.5 m	Black		4
3689SW0002					Yellow		



SPECIALTY CORDS | ROYAL® CORDS

SPECIALTY EXTENSION CORDS

6-50 WELDER EXTENSION CORD



19178806



Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.



- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Generator, Pool Pump
- NEMA L5-20P

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
19178806	8/3	STW	25'	7.6 m	Blue	40	2	 NEMA 6-50P	 NEMA 6-50R

WELDING PLUG ADAPTER

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
19408808	8/3	STW	1.5'	0.46 m	Black	40	12	 NEMA 14-50P	 NEMA 6-50R

SPECIALTY EXTENSION CORDS



AGRIPRO™ CORDS

Oil Resistant Cords (SJTOW) are designed to withstand harsh conditions where fuel and fertilizers are often used. As basic SJTW cords come into contact with common chemicals, they can swell and become brittle.



SPECIALTY CORDS | AGRIPRO™

SPECIALTY EXTENSION CORDS


AGRIPRO™ OIL RESISTANT EXTENSION CORD

12770008



Agri-Pro™ extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature Rating of -58°F to 221°F (-50°C to 105°C)
- 125 Voltage Rating
- Abrasion, Chemical and Oil Resistant
- Common Applications: Air Compressor, Chop Saw, Electric Chain Saw



SPECIFICATIONS


STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
12270008	16/3	SJEOW	25'	7.6 m	Black	13	12
12280008			50'	15.2 m			12
64815701	14/3	SJTOW	25'	7.6 m		15	12
64816001			50'	15.2 m			6
64816301			100'	30.5 m		13	4
67729001	12/3		25'	7.6 m		15	12
64816901			50'	15.2 m			6
64817201			100'	30.5 m			4
64817501	10/3		25'	7.6 m			6
64817801			50'	15.2 m			4
64818101			100'	30.5 m			3



SPECIALTY EXTENSION CORDS


AGRIPRO™ 3-OUTLET OIL RESISTANT EXTENSION CORD

54533501

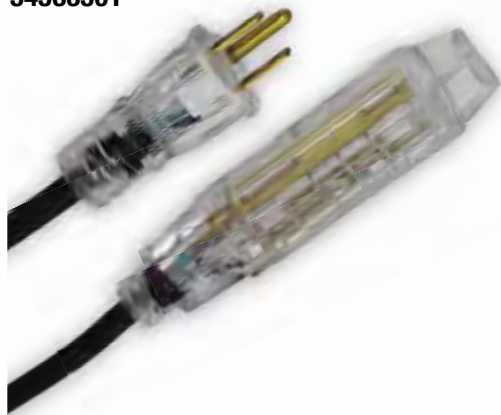

Agri-Pro™ extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature Rating of -58°F to 221°F (-50°C to 105°C)
- 125 Voltage Rating
- Abrasion, Chemical and Oil Resistant
- Common Applications: Air Compressor, Chop Saw, Electric Chain Saw



NEMA 5-15R NEMA 5-15P

** Lighted Banana Receptacle*

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
54533501 ***	14/3	SJOW	15'	4.6 m	Black	15	18


AGRIPRO™ TRITAP OIL RESISTANT EXTENSION CORD

2451



Agri-Pro™ extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature Rating of -58°F to 221°F (-50°C to 105°C)
- 125 Voltage Rating
- Abrasion, Chemical and Oil Resistant
- Common Applications: Air Compressor, Chop Saw, Electric Chain Saw



NEMA 5-15R NEMA 5-15P

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2451	14/3	SJTOW	25'	7.6M	Black	15	12


SPECIALTY EXTENSION CORDS

12/3 FLAT CONVERSION CENTER CORDS

64825001



- Temperature Rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Flat cable construction makes it ideal for passing under carpets at temporary events



SPECIFICATIONS

**-40°F to 140°F (-40°C to 60°C) * 125V * Flat cable construction makes it ideal for passing under carpets at temporary events*

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
64825001	12/3	SJT	15'	4.6 m	Black	15	12
64828101			25'	7.6 m			12
64828401			50'	15.2 m			6

SPECIALTY EXTENSION CORDS


20A METAL POWER STRIPS

5120



Heavy-Duty 20 Amp Metal Power Strip with 6' Cord has:

- Housing Made with Cold-Rolled Steel
- Receptacles Accept NEMA 5-15 Plugs
- Keyhole Mounting - Template Included
- Electrical Specs: 125 VAC, 20 Amps, 2500 Watts



SPECIFICATIONS

STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	CORD LENGTH (FT)	CORD LENGTH (M)	AMPS	CASE PACK QUANTITY
5120	Southwire Heavy-Duty 20 Amp Metal Power Strip with 6' Cord	12/3	SJT	6'	1.8 m	20	4
5122	Southwire Heavy-Duty 20 Amp Metal Power Strip with 15' Cord			15'	4.6 m		


MAGNETIC METAL POWER STRIPS

5126



Southwire Magnetic Power Strips are sure to be an attractive solution on the jobsite. Stick them to a metal surface and the 25+ pounds of pull force will hold in place with cords plugged in. Enhance jobsite safety by keeping electrical connections off the floor. Perfect for use with metal studs, tool boxes, I-beams, and more.

- Heavy-duty cold-rolled steel construction
- Rare Earth magnets with pull force of 25 pounds
- Lighted switch with integrated overload protection
- 6 Outlets (NEMA 5-15) with 2 spaced for large plugs



SPECIFICATIONS

STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	CORD LENGTH (FT)	CORD LENGTH (M)	AMPS	CASE PACK QUANTITY
5126	Southwire 6-Outlet Magnetic Power Strip with 6' Cord	14/3	SJT	6'	1.8 m	15	4
5127	Southwire 6-Outlet Magnetic USB Power Strip with 8' Cord			8'	2.4 m		

SPECIALTY EXTENSION CORDS



COILED CORDS

Coiled cords, also called retractile or Curly cords, consist of metal wires encased in a flexible, spiral jacket. The wires can be copper or aluminum, and the spiral jacket is usually made of an insulating material such as thermoset or thermoplastic resins like PVC. The material acts as a moisture barrier for the wires inside.

Coiled cords are used for many types of applications, including:

- Aeronautical
- Commercial
- Industrial
- Medical
- Military



SPECIALTY EXTENSION CORDS

125V INDOOR MAJOR APPLIANCE REPLACEMENT CORDS

98130008



- Temperature Rating of -58°F to 194°F (-50°C to 90°C)
- 300 Voltage Rating (SJEOW)
- 600 Voltage Rating (SEOW & SE00W)

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	VOLTS	CASE PACK QUANTITY
98090008	18/2	SJEOW	4-20'	1.2-6 m	Black	N/A	300	10
98100008	18/3							12
98110008	18/4							10
98120008	16/2							10
98130008	16/3							SJE00W
12200008		4-20'	1.2-6 m	13			12	
12260008								
98140008	16/4			SJEOW		N/A	300	10
99110008	14/2			SE00W			600	10
98150008	14/3	SEOW		5				
98260008		SJEOW	1-5'	0.3-1.52 m			300	25
99120008		SE00W	4-20'	1.2-6 m			600	10
98160008	12/3	SEOW						5

SPECIALTY CORDS | COILED CORDS

RANGE • DRYER • APPLIANCE • REPLACEMENT CORDS

Southwire offers a variety of in-home replacement cords providing multiple options for different plug configurations, and strain relief clamps help prevent cord damage.



RANGE • DRYER • APPLIANCE







RANGE AND DRYER CORDS

9014SW8809



- Temperature rating of -4°F to 140°F (-20°C to 60°C)
- 125/250 Voltage Rating

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	NUMBERS OF WIRES	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	
9014SW8809	6/2-8/1	SRDT Flat	3	4'	1.2 m	Gray	50	6	 NEMA 10-50P	
9016SW8809			3	6'	1.8 m			6		
9044SW8808	6/2-8/2	SDRT Round	4	4'	1.2 m	Black		40	6	 NEMA 14-50P
9046SW8808			4	6'	1.8 m				6	
544094**	8/2-10/2	DRT	4	5'	1.5 m		40	8		
544147**			4	5'				15		
544120* **	10/2		3	5'			30	8	 NEMA 14-30P	
544150*			3	5'			40	15	 NEMA 14-50P	
9124SW8809	10/3	SDRT Flat	3	4'	1.2 m	Gray	30	6	 NEMA 10-30P	
9126SW8809			4	6'	1.8 m		30	6		
9154SW8808	10/4	SDRT Round	4	4'	1.2 m	Black	30	6	 NEMA 14-30P	
9156SW8808			4	6'	1.8 m		30	6		

ELECTRIC OUTLET GAS RANGE ADAPTER 250V TO 125V

9042SW8801



- Converts a 220V Outlet to 120V
- Commonly used when installing an electric range where a gas range previously worked
- Helps avoid re-wiring an outlet in a home

STOCK #	COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
9042SW8801	White with Black Pull Handle	15	4	NEMA 14-50P	NEMA 5-15R

RANGE & DRYER | CORDS & ADAPTER

RANGE · DRYER · APPLIANCE

GARAGE & WORKSHOP REPLACEMENT POWER SUPPLY CORDS

9853SW0008



- Temperature rating of:
 - SJEOW -58°F to 221°F (-50°C to 105°C)
 - SJT -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Trimmer, Electric Chainsaw, Air Compressor



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
9853SW0008	16/2	SJEOW	6'	1.8 m	Black	13	50
9854SW0008			9'	2.7 m			50
98388808	16/3	SJT	2.5'	0.7 m			100
9855SW0008		SJEOW	6'	1.8 m		15	50
9856SW0008			9'	2.7 m			50
9857SW0008		SJEOW	6'	1.8 m			25
9858SW0008			9'	2.7 m			25
90110008	12/3	SE00W	2'	0.6 m			50
90120008			2'	0.6 m			50

INDOOR ROUND REPLACEMENT POWER SUPPLY CORDS

9702SW8808



- Temperature Rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Vacuum, Electric Drill, Work Light



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
9702SW8808	16/2	SJTW	6'	1.8 m	Black	13	25
9703SW8808	16/3		3'	0.9 m			
9706SW8808			6'	1.8 m			
9709SW8808			9'	2.7 m			
9716SW8808	14/3		6'	1.8 m		15	
9719SW8808			9'	2.7 m			


RANGE • DRYER • APPLIANCE

INDOOR FLAT REPLACEMENT POWER SUPPLY CORDS

9723SW8809



- Temperature Rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Microwave, Refrigerator, Dehumidifier



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	NUMBERS OF WIRES	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
9723SW8809	16/3	SPT-3	Right Angle	3'	0.9 m	Gray	13	25
9733SW8809			Straight	3'	0.9 m			
9724SW8809			Right Angle	4'	1.2 m			
9734SW8809			Straight	4'	1.2 m			
9726SW8809			Right Angle	6'	1.8 m			
9736SW8809			Straight	6'	1.8 m			
9743SW8823	14/3		Straight	3'	0.9 m	Beige	15	
9743SW09			Straight	3'	0.9 m	Gray		
9746SW8823			Straight	6'	1.8 m	Beige		
98700009			12/3	Right Angle	6'	1.8 m		

APPLIANCE | POWER SUPPLY


RANGE • DRYER • APPLIANCE

125V INDOOR MAJOR APPLIANCE REPLACEMENT CORDS

3531SW3323



- Temperature Rating of -4°F to 140°F (-20°C to 60°C)
- 125 Voltage Rating (250 Voltage Rating for 3537SW8809)
- Common Applications: Air Conditioner, Space Heater, Refrigerator



SPECIFICATIONS


STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3531SW3323	14/3	SPT-3	3'	0.9 m	Beige	15	36
3531SW09			3'	0.9 m	Gray		24
3532SW3323			6'	1.8 m	Beige		24
3532SW09			6'	1.8 m	Gray		24
3533SW3323			9'	2.7 m	Beige		15
3535SW3323			12'	3.7 m	Beige		12
3536SW3323			15'	4.6 m	Beige		12

250V INDOOR MAJOR APPLIANCE REPLACEMENT CORDS

3537SW8809



- Temperature Rating of -4°F to 140°F (-20°C to 60°C)
- 125 Voltage Rating (250 Voltage Rating for 3537SW8809)
- Common Applications: Air Conditioner, Space Heater, Refrigerator



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3537SW8809*	12/3	SPT-3	9'	2.7 m	Gray	20	18

* (*6-20 P/R)

CORD MANAGEMENT & REELS

Southwire's cord organization options for keeping bulky extension cords, ropes, and holiday lighting tangle free.



CORD MANAGEMENT

CORD ORGANIZATION CORD STORAGE WRAPS

3202



SPECIFICATIONS

STOCK #	DESCRIPTION	HOLDS	COLOR	CASE PACK QUANTITY
3202	Resin Cord Wrap With Stand	100' of 14/3 Gauge Cord	Yellow	10
247737	Resin Cord Wrap With Integrated Tritap Adapter	50' of 14/3 Gauge Cord	Black	3
2803	Black, Mountable H-Frame Extension Cord Reel	100' of 16/3 gauge cord	Black	12
E101	Yellow, Mountable Cord Storage Extension Cord Reel	100' of 16/3 gauge cord	Yellow	24
64788201	Black Cord Caddy H-Rack Tray Pack	50' of 14/3 gauge cord	Black	24

CORD STORAGE REEL

E-230



SPECIFICATIONS

**with metal stand*

STOCK #	DESCRIPTION	HOLDS	COLOR	CASE PACK QUANTITY
E230*	Resin Reel With Metal Stand And Four Grounded Outlets	50' of 12/3 Gauge Cord	Black/Yellow	4
547702	Extension Cord Storage Wheel	6' Of 14/3 Gauge Cord	Black	8
E102	Extension Cord Storage Reel	150' Of 16/3, 125' Of 14/3, And 75' Of 12/3	Red/Black	8
E103	Extension Cord Storage Wheel	Holds 125' Of 14/3 Gauge Cord	Red/Black	4
22849*	Extension Cord Reel With Metal Stand	Holds 100' Of 14/3 Gauge Cords	Black	6

CORD MANAGEMENT

CORD REELS

E-235



445825



E231



E2801



SPECIFICATIONS

STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	CASE PACK QUANTITY
E235	Power Station Cord Reel With Metal Stand, 6 Grounded Outlets, And On Off Switch And Built In Circuit Breaker	14/3	SJTW	50'	15.2 m	Red/Black/ Yellow	2
445825**	Portable Cord Caddy With Handle And Tritap Receptacle	14/3	SJTW	50'	15.2 m	Black	3
E238	Power Station Cord Reel With Metal Stand, 6 Grounded Outlets, And On Off Switch And Built In Circuit Breaker	12/3	SJTW	50'	15.2 m	Green/Black/ Yellow	2
E231	Retractable Extension Cord Reel, 4 Grounded outlets and On Off switch	16/3	SJTW	20'	6.1 m	Black/Yellow	6
2801	Portable Extension Cord Reel Power Station, 4 Grounded Outlets	16/3	SJT	25'	7.6 m	Black/Yellow	3
4907	Extension cord Reel with 4 Grounded Outlets	16/3	SJTW	25'	7.6 m	Black/Yellow	4
545794	Cord Caddy Self-Storing Extension Cord with 4 Grounded Outlets	16/3	SJTW	32.81'	10 m	Orange	6

CORD MANAGEMENT

RETRACTABLE CORD REELS WITH LIGHTED TRITAP

E315



48006SW



E316



SPECIFICATIONS

**Black End ^Banana Plug*

STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	OUTLETS	AMPS	CASE PACK QUANTITY
E315	Retractable Extension Cord Reel	16/3	SVT	20'	6.1 m	Black/Yellow	3	13	4
E215^	Metal Retractable Extension Cord Reel With Lighted End	16/3	SJT	30'	9.1 m	Silver/Black	3	13	2
48006SW*	Metal Retractable Extension Cord Reel	14/3	SJTW	30'	9.1 m	Red/Black	3	15	3
E316	Retractable Extension Cord Reel With Lighted End	14/3	SJTW	45'	13.7 m	Green/Black	3	15	2
48208802SW	Retractable Extension Cord Reel With Lighted End	12/3	SJTW	50'	15.2 m	Black/Yellow	3	13	1

RETRACTABLE CORD REEL WITH WORK LIGHT

E216



48000



SPECIFICATIONS

STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	OUTLETS	AMPS	CASE PACK QUANTITY
E216	Retractable Extension Cord Wheel With Work Light	16/3	SJTW	20'	6.1 m	Yellow/Black	1	13	4
48000	Metal Retractable Extension Cord Wheel With Trouble Light	16/3	SJTW	40'	12.1 m	Red/Black	1	13	3

CORD MANAGEMENT

RETRACTABLE CORD REEL WITH LOCKING PLUG

48004



SPECIFICATIONS

STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	OUTLETS	AMPS	CASE PACK QUANTITY
48004	Metal Retractable Extension Cord Wheel With Locking Plug	14/3	SJTW	30'	9.1 m	Red/Black	1	15	3

INDUSTRIAL RETRACTABLE CORD REELS

R112318845



R112718845



R112308845




SPECIFICATIONS

**with GFCI*

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	OUTLETS	AMPS	CASE PACK QUANTITY
R112318845	12/3	SJEOW	45'	13.7 m	Yellow/Black	1	20	1
R112718845*						2		
R112308845						1	15	

CORD MANAGEMENT | RETRACTABLE

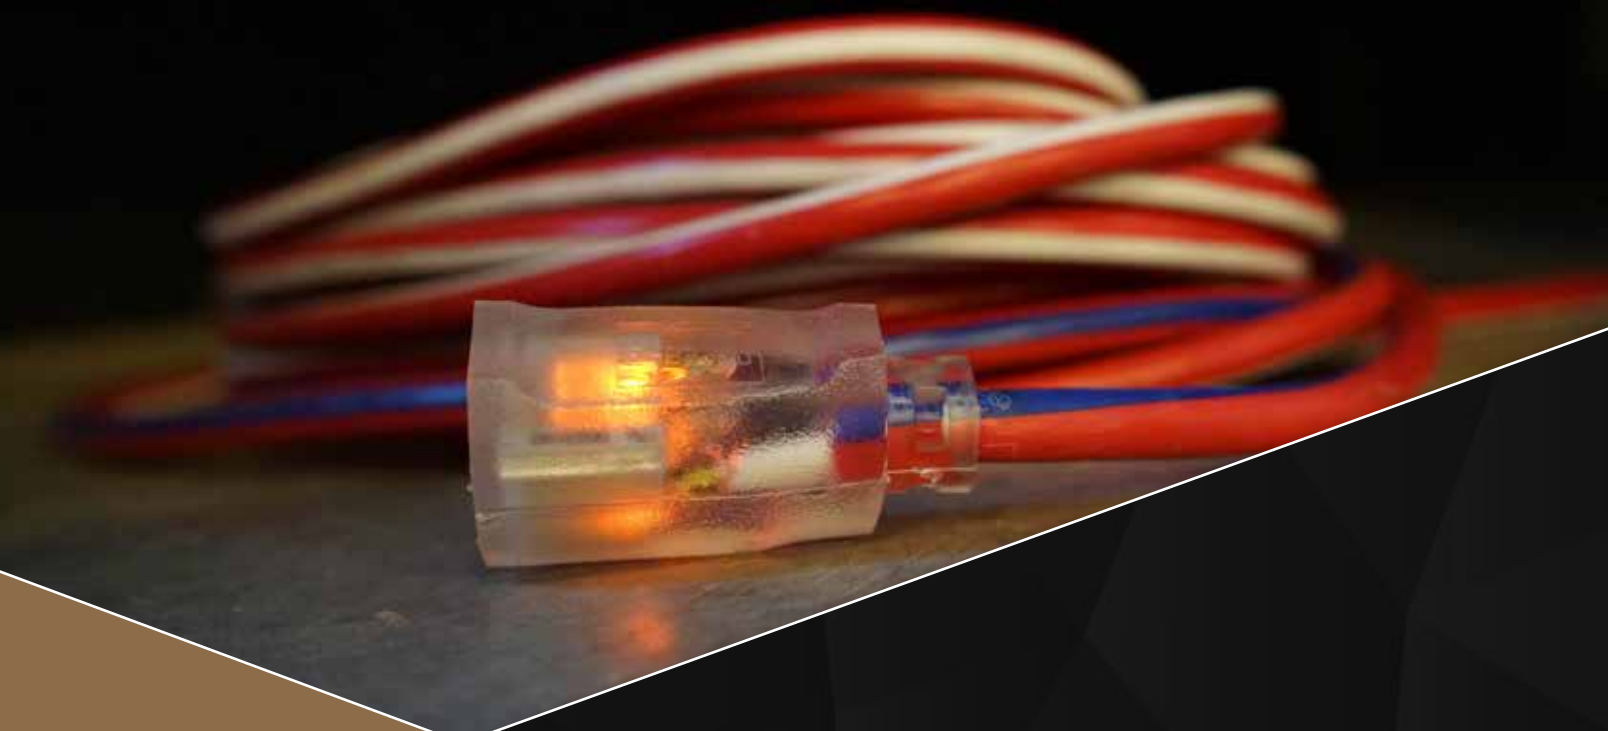

Southwire™

CORD SOLUTIONS

CATALOG

GET SOCIAL WITH US:



/SOUTHWIRETOOLS
/SOUTHWIRETOOLSLATINO



@SOUTHWIRETOOLS



@SOUTHWIRETOOLS



SOUTHWIRETOOLS

SOUTHWIRE.COM | 1-855-SWTTOOLS

All Trademarks or Registered Trademarks (TM/®) are owned or licensed by Southwire Company.
Any other TM/® - Trademark or Registered Trademark of Southwire Company.